

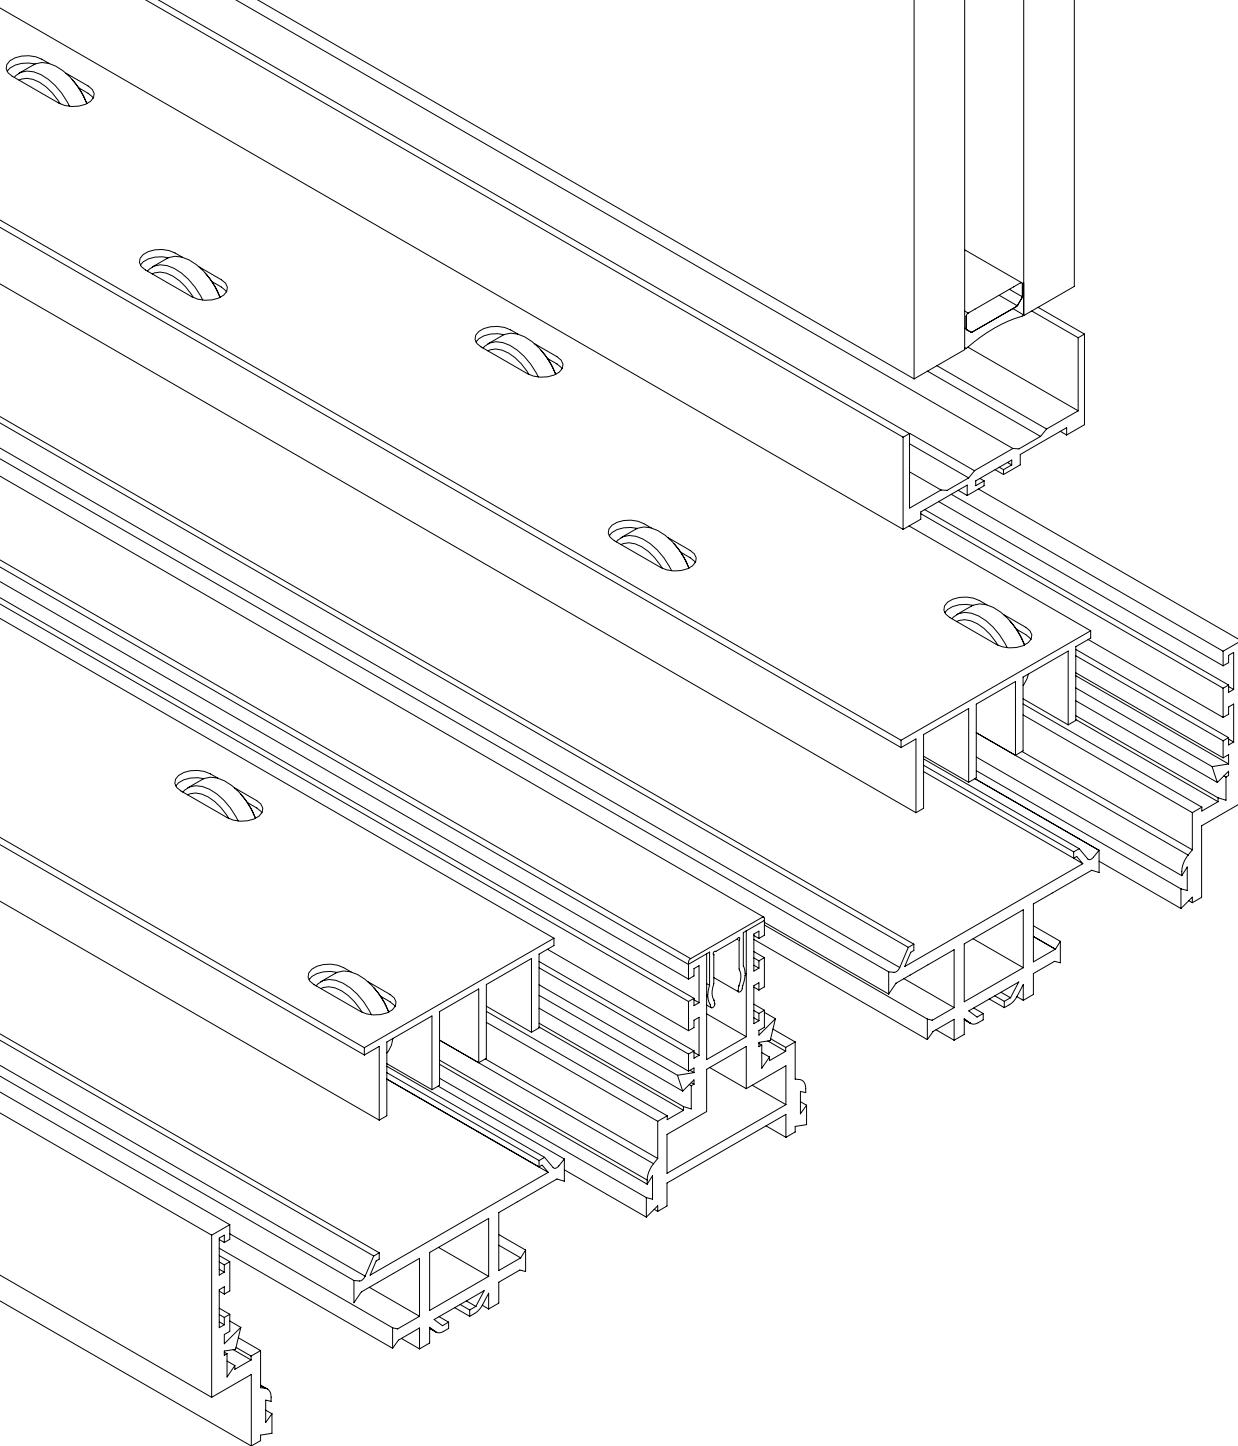







88
3.
ia



sliding system sistema de corredera

● monorail ●● birail ●●● multirail



performance up to rendimiento hasta

thermal coefficient $U_w = 0.816W/m^2.K$
coeficiente térmico $(U_g = 0.47W/m^2.K)$

air tightness Class 4
resistencia al aire

wind resistance Class C5
resistencia al viento

water tightness Class E900
resistencia al agua

sound insulation 41dB
aislamiento acústico

security RC2
seguridad

achievements HVHZ4 / 50 psf
logros

dimensions dimensiones

A	38mm	D	48mm
B	20mm	E	27mm
C	124mm	F	10mm


main components componentes principales

- 1 main frame marco principal
- 2 glass up to 19m² vidrio hasta 19m²
- 3 polyamide poliamida
- 4 central mullion montante central
- 5 handle tirador
- 6 multipoint locking system sistema de cierre multipunto
- 7 removable bearing profile perfil de rodamientos extraíble

[en] ah!38 excels as an exterior opening system comprising a balanced combination of thermal and acoustic behavior, suited to all climates. It offers great flexibility in the modular composition of openings, including opening corner solutions, pocket sliding configurations, curved layouts, tilted spans and retractable mosquito nets. The alternatives come in a wide range of formats such as sliding, vertical sliding, pivot and tilt-turn units. ah!38 also includes a variety of add-ons, finishes and it can be completely automated. It is a system that allows double glazed surface areas of up to 19m², or triple glazed of up to 6m². Both options use 20mm vertical profiles.

[es] ah!38 se distingue como un sistema que comprende una combinación equilibrada de comportamiento térmico y acústico. Ofrece gran flexibilidad en la composición modular de las aperturas, incluyendo soluciones de aperturas en esquinas, configuraciones de correderas retráctiles, diseños curvos, aperturas inclinadas y mosquiteras retráctiles. Las alternativas llegan con una amplia variedad de formatos tales como corredera horizontal, vertical, pivotantes y basculantes. ah!38 incluye también una variedad de complementos y acabados que pueden ser completamente automatizado. Es un sistema que permite superficies con vidrio doble de hasta 19m², o con vidrio triple de hasta 6m². Ambas opciones usan perfiles verticales de 20mm.

sliding birail vertical section sección vertical corredera birail

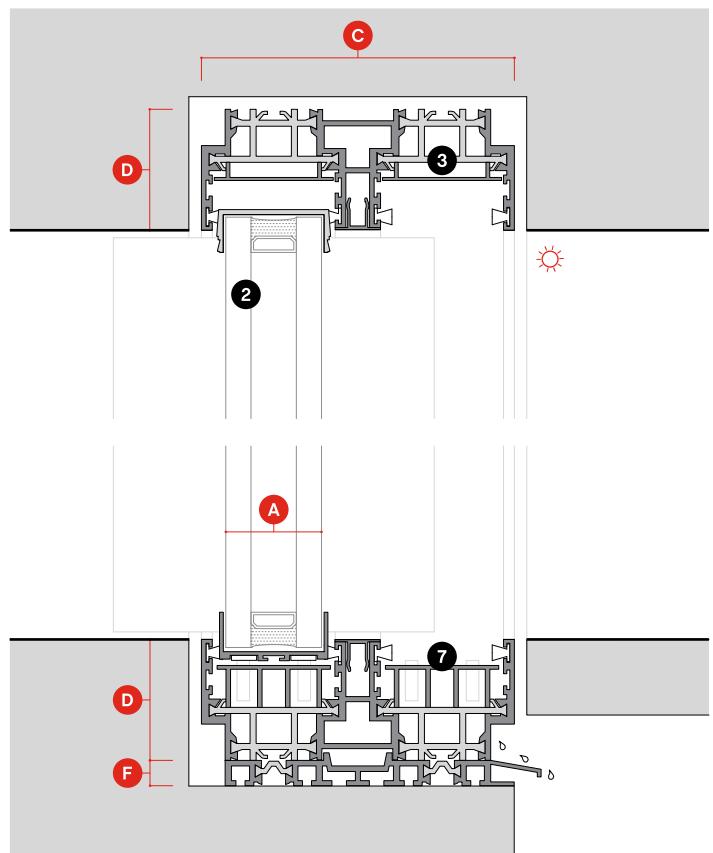

sliding birail horizontal section sección horizontal corredera birail

